1200X 1200M REGULAR SURFACES

120x120CM

INDEX

Glossy Surface 🎏

Matt Surface 🎉

High Glossy Surface 🎏

Dark High Glossy Surface 🌤

Carving Surface 🕌

1200 X 1200MM

Glossy Surface

Polished Glazed Vitrified Tiles

1200 X 1200MM






































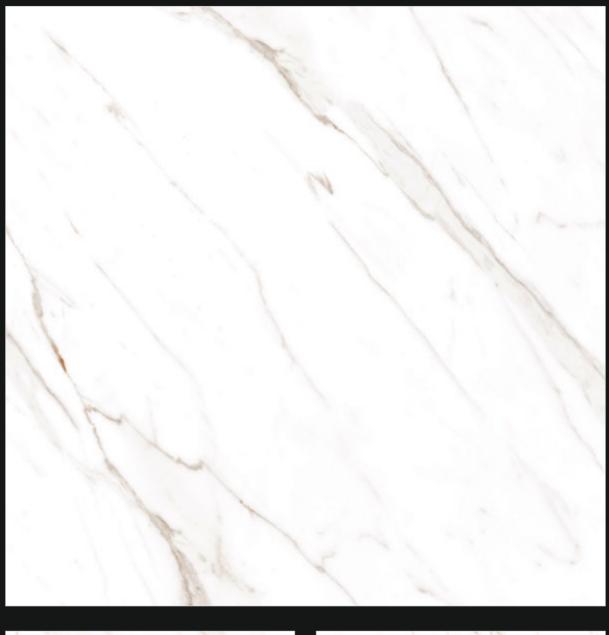



























Florito 1200x1200mm

Glossy


























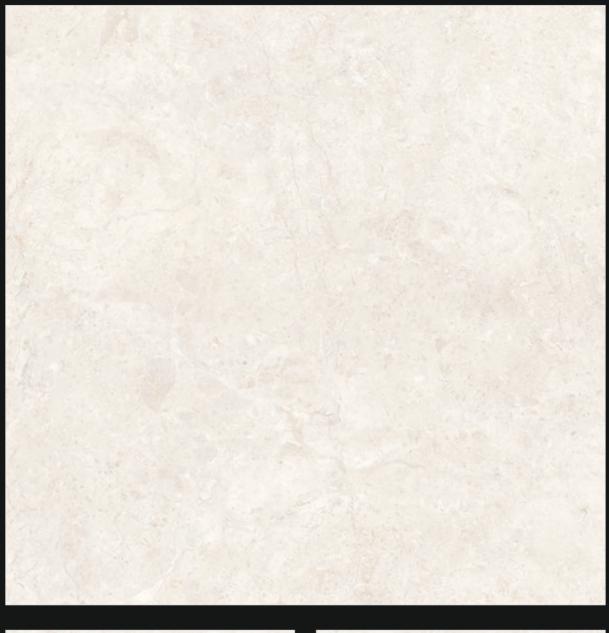










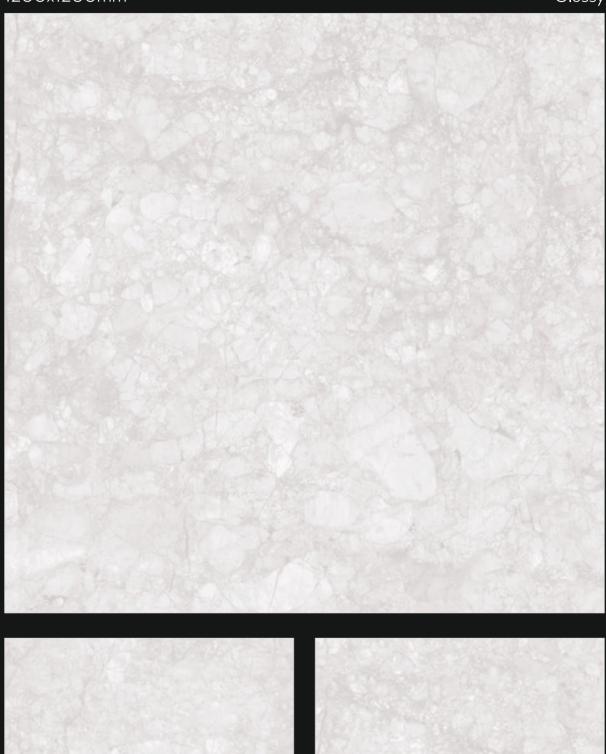

























6 Random













6 Random







6 Random








6 Random

















































6 Random



























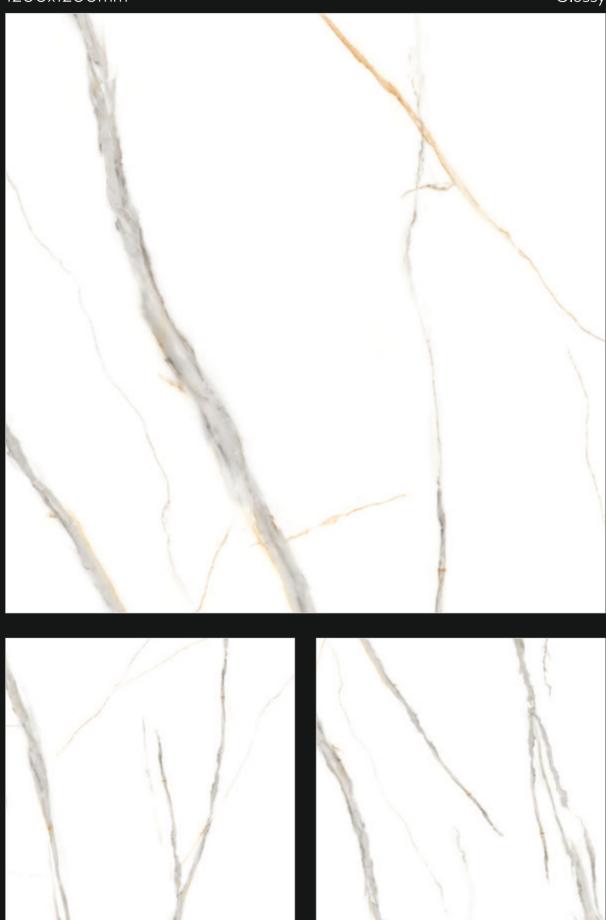







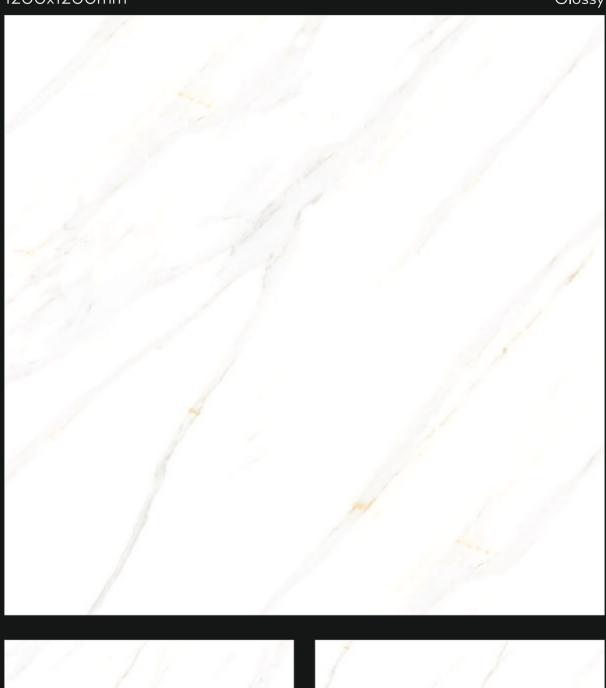















































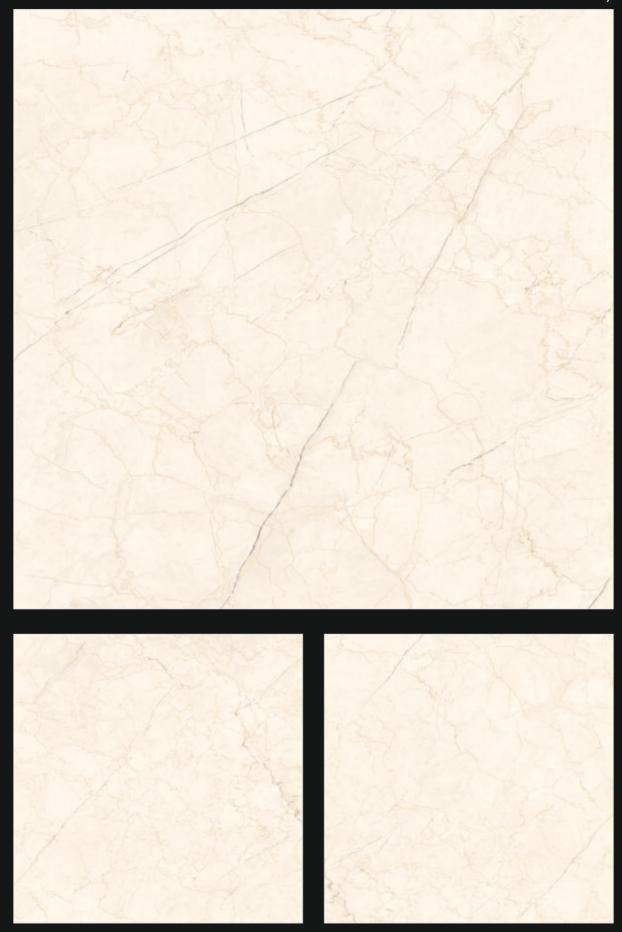


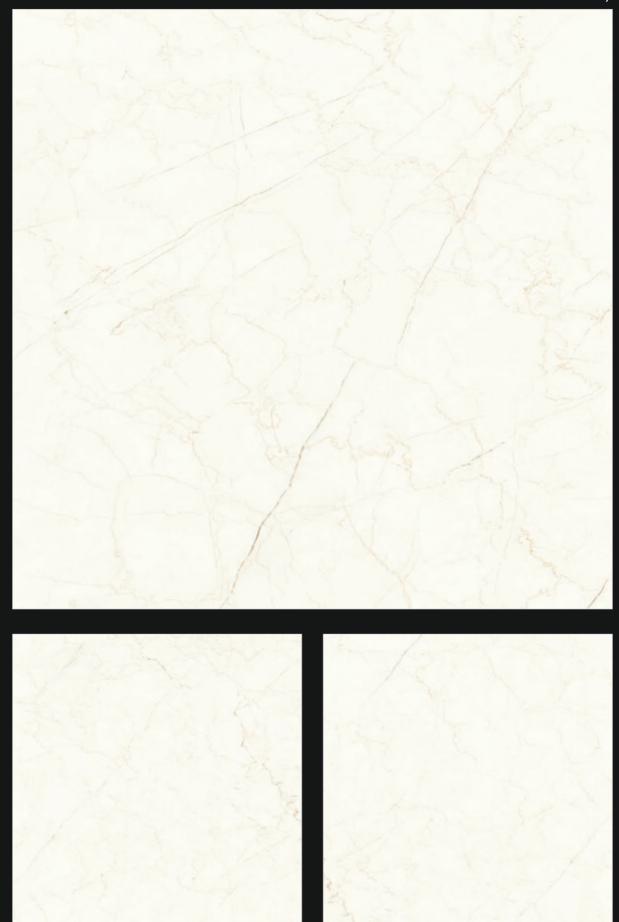


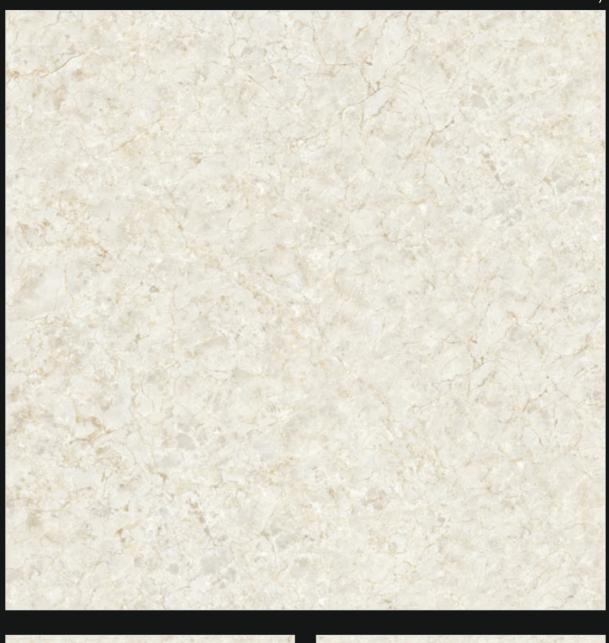





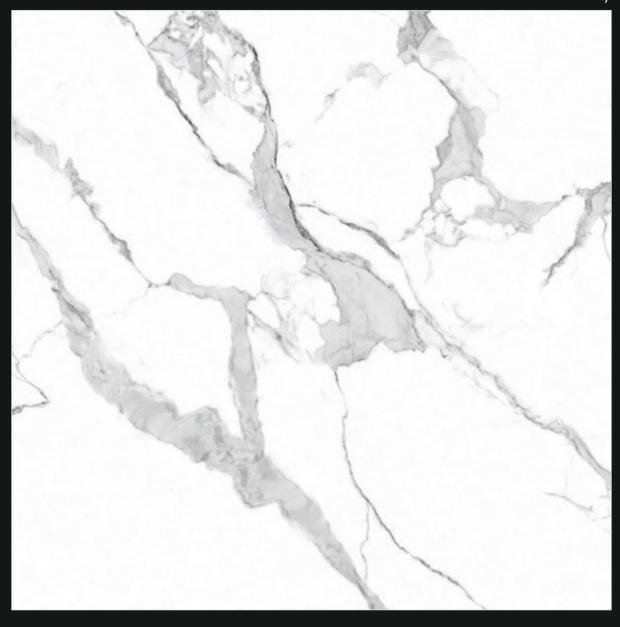





ATT Surface

Non Polished Glazed Vitrified Tiles

1200 X 1200MM









































HIGH GLOSSY Surface

Polished Tiles With High Gloss Visibility Compared To PGVT Surface

1200 X 1200MM






































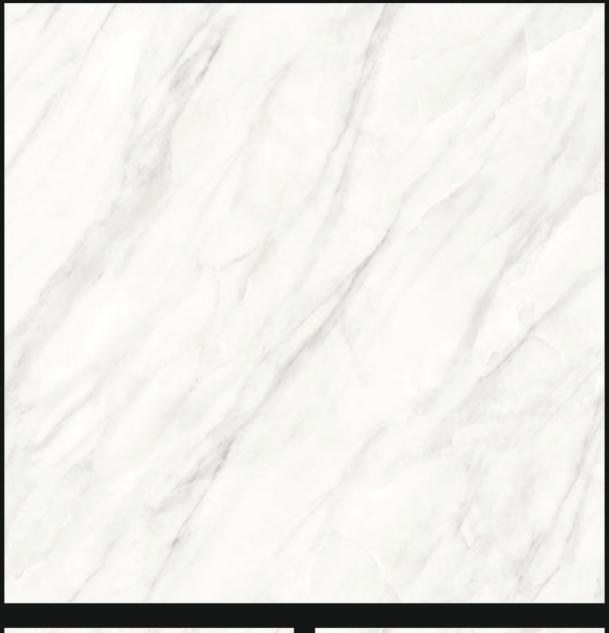















































Florence 1200x1200mm

High Glossy


























































































DARK HIGH GLOSSY Surface

Dark Designs Tiles With High Glossy Visibility

1200 X 1200MM







6 Random







6 Random







6 Random













4 Random

Forest 1200x1200mm

Dark High Glossy







6 Random







6 Random







6 Random

Pietra 1200x1200mm

Dark High Glossy



















6 Random








6 Random



6 Random

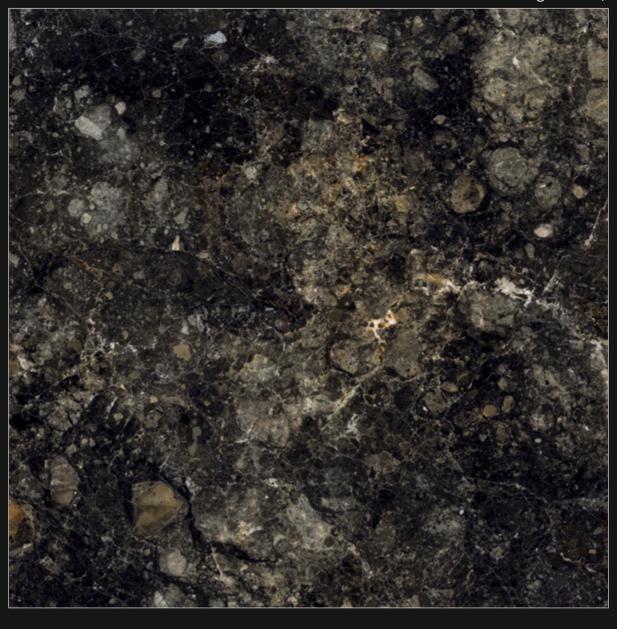





6 Random







5 Random







CARVING Surface

Non Polished Carved Glazed Vitrified Tiles

1200 X 1200MM











Graffiti **Black** 1200x1200mm

Carving








Graffiti **Dove** 1200x1200mm

Carving

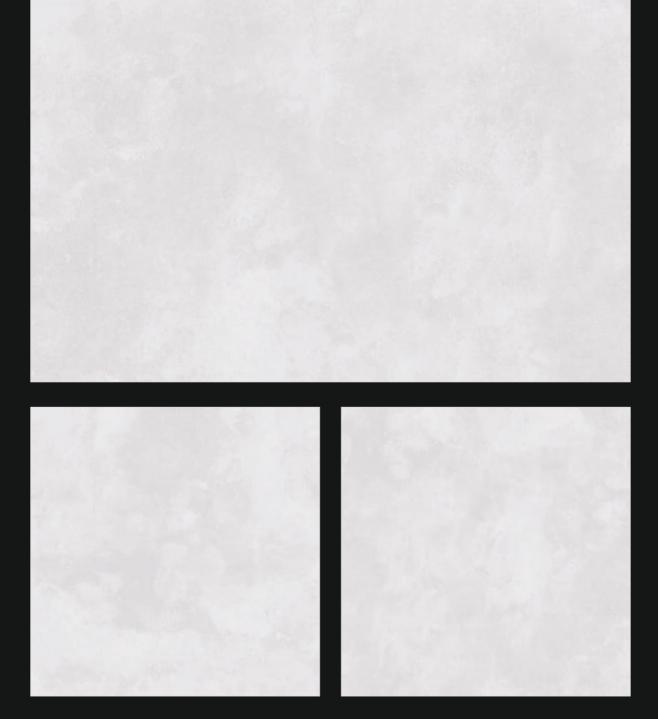













Technical Specification

CHARACTERISTICS										
	TEST METHOD		B1a STD VALUES		SLAB VALUES					
DIMENSIONS AND SURFACE QUALITY	ISO 13006:2012(E)	IS 15622-2017, GROUP B1a, E ≤ 0.08 %	%	мм	%	мм				
Deviation In Length	ISO 10545-2	IS 13630 -Part-1	± 0.6%	± 2.0 MM	± 0.03%	± 0.50 MM				
Deviation In Width	ISO 10545-2	IS 13630 -Part-1	± 0.6%	± 2.0 MM	± 0.03%	± 0.50 MM				
Deviation In Thickness	ISO 10545-2	IS 13630 -Part-1	± 5.0 %	± 0.5 MM	± 3.50%	± 0.30 MM				
Streightness Of sides	ISO 10545-2	IS 13630 -Part-1	± 0.5%	± 1.5 MM	± 0.02%	± 0.35 MM				
Rectangularity	ISO 10545-2	IS 13630 -Part-1	± 0.5%	± 2.0 MM	± 0.05%	± 0.90 MM				
Surface Flatness	ISO 10545-2	IS 13630 -Part-1	± 0.5%	± 2.0 MM	± 0.06%	± 1.20 MM				
Surface Quality 95% Free From Visible Defects	ISO 10545-2	IS 13630 -Part-1	95%		Con	form				
PHYSICAL PROPERTY										
WA %	ISO 10545-3	IS 13630 -Part-2	Eb ≤ 0.5 % Individual Maximum 0.6 %		≤ 0.08%					
MOR N/MM²	ISO 10545-4	IS 13630 -Part-6	Min 35 Individual Min 32		Min 42 Individual Min 32					
Breaking Strength N For Thick >7.5 MM)	ISO 10545-4	IS 13630 -Part-6	>1300		>2000 (On 600X600)					
Impact Resistance - Co-Efficient of	ISO 10545-5	IS 13630 -Part-14	Not Compulsory		>0.55					
Deep Abrasion Resistance For Unglazed Tiles	ISO 10545-6	IS 13630 -Part-12	Max 175 MM³		Only For Unglazed Tiles					
Resistance To Surface Abrasion - Glazed Tiles	ISO 10545-7	IS 13630 -Part-11, Class-2	Report Abration Class		Min. Class 3 Or As Per Product Required					
Co-efficient Of Linear Thermal Expansion	ISO 10545-8	IS 13630 -Part-4	Ambient to 100°C		Max 6X10 ⁻⁶					
Thermal Shock Resistance 15/145 °C 10 Cycle	ISO 10545-9	IS 13630 -Part-5	Not Compulsory		10 Cycle min					
Moisture Expansion MM/M	ISO 10545-10	IS 13630 -Part-3	Not Compulsory		Max 0.02 MM/M					
Resistance To Crazing	ISO 10545-11	IS 13630 -Part-9	Required		4 Cycle Pass, @ 7.5 Kg Steam Pressure					
Frost Resistance	ISO 10545-12	IS 13630 -Part-10	Required		Conform					
Resistance To Household Chemicals And Swimming Pool Salts: Glazed Tiles	ISO 10545-13	IS 13630 -Part-7	Min GB		Min GB					
Scratch Hardness Of Surface	IS 13630-13	IS 13630 -Part-13	Min 5		Min 5, Or As Required					
Bulk Density Gm/CC		IS 13630 -Part-2	2.20 Min		>2.25					
CHEMICAL PROPERTY										
Resistance To Stain Glazed Tiles	ISO 10545-14	IS 13630 -Part-8, Class 1	Min Class 3		Conform					
Lead And Cadmium Release- Glazed Tiles	ISO 10545-15		Not Compulsory Not Co		Not Com	ipulsory				
Small Colour Differences	ISO 10545-16			Not Compulsory/ Not Compulsory/ Plain Coloured Plain Coloured Tiles						

Packing Details

SIZE	PCS/BOX	WEIGHT (APPROX)	THICKNESS (APPROX)	SQ.FT./BOX	SQ.MTR./BOX
1200 X 1200 MM	2	60 Kg	9 MM	31	2.88

THANKYOU